

# NATIONAL RURAL FENCING PRODUCT GUIDE

Australian made and owned fencing solutions





# CONTACTS

## Southern Wire Pty Ltd

### Head Office & Manufacturing

311 Collier Road Bassendean WA 6054

Mailing Address:

PO Box 3232 Bassendean DC WA 6942



Phone: +61 8 9279 9999

Fax: +61 8 9377 3888



Orders:

[orders@southernwire.com.au](mailto:orders@southernwire.com.au)

Enquiries:

[enquiries@southernwire.com.au](mailto:enquiries@southernwire.com.au)

### SA Warehouse Phone:

1800 627 722

Two Wells SA 5501

### VIC Warehouse Phone:

1800 627 722

Derrimut VIC 3026

### NSW Warehouse

Phone: 1800 627 722

Girraween NSW 2145

### QLD Warehouse Phone:

1800 627 722

Rocklea QLD 4106

### NT Warehouse

Phone: 1800 627 722

Berrimah NT 0828

## WHO WE ARE

Southern Wire was established in 1993 and is a leading Australian manufacturer of farm fencing. Our focus on quality and innovation from the beginning has ensured that Southern Wire now offers a range of superior farm fencing products and solutions that are unrivalled in the market.

## Reasons to buy Southern Wire

From the outset, Southern Wire successfully introduced a stronger hinged joint fencing, fabricated totally from high tensile wire. This was followed by Griplock, the 'fixed knot' fence renowned worldwide for being the strongest pre-fabricated farm fence available on the market. Griplock continues to replace the older 'ring joint' fences, capturing a steadily increasing market share. More recently there's Fastlock, the new high performance fencing, featuring a new generation 'square knot' design for increased strength and safety. Now there's FarmFence which supersedes the old 'ring joint' and 'hinged joint' type fences by offering outstanding economy combined with high tensile, heavy galvanised construction, one-piece vertical wires and stronger, easier to handle joints.

Southern Wire products have built a reputation synonymous with quality and unmatched durability, meaning they are insisted on for projects where the best fence is of paramount importance. They have been used to bring many successful projects to completion, ranging in diversity from sheep studs in WA's Great Southern region to airstrips in the Murchison, from exotic animal enclosures in South East Asia to cattle ranches in North America.

The quality of all Southern Wire's range of products is guaranteed and backed by the full resources of the company. Southern Wire exceeds the Australian Standard requirements at every stage of our manufacturing process, ensuring that our full range of fencing can be confidently specified in the most demanding of environments across rural Australia.

If you require additional information, ask your fencing agent or Freecall Southern Wire for assistance on **1800 627 722**.



# CONTENTS

## PREFABRICATED FENCING & WIRE NETTING

	Page
FarmFence	4
Fastlock Toughline	5
Fastlock Premier50	6
Griplock	7
Hinged Joint	8
Fastlock HorseFence & YardFence	9
Fastlock Vermin	10
Fastlock Vermin plus Apron	11
Griplock Vermin	12
Griplock Vermin plus Apron	13
Wire Netting	14

## BARBED WIRE & PLAIN WIRE

	Page
Barbed Wire	15
Plain Wire Heavy Galv	16
Plain Wire Premier50	17

## STEEL POSTS, SPACERS & END ASSEMBLIES

	Page
Steel Fence Posts	18-19
End Assemblies	20-21

## FARM GATES & MESH

	Page
Farm Gates for WA	22-24
Farm Gates	22
Cattle Gates	23
Horse Gates	23
5 Bar Cattle Gates	23
Vermin Exclusion Gates	24
Gate Fittings	24
Farm Gates for SA, VIC, TAS, NSW & QLD	25
Farm Gates	25
Cattle Gates	25
Sheepyard Mesh	26

## CHAINMESH FENCING

	Page
Chainmesh	27
Galvanised Pipe	28
Yard Building	28
Chainmesh Gates	29
Hinges & Pipe Fittings	30

## FENCING TOOLS & ACCESSORIES

31-32

## GATE OPENERS



	Page
Mighty Mule Automatic Gate Openers	33

## FENCING MACHINERY

	Page
Titan Post Driver	33

## PREFABRICATED WIRE SPACINGS

34-35

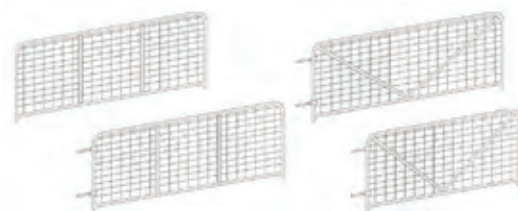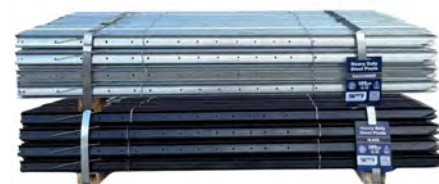





For WIRE SPACINGS

see page 36.



## FarmFence

FarmFence is a high quality, Australian manufactured product that is positioned to represent fair value for the price conscious buyer.

The 2.50mm heavy galvanised wire used to manufacture FarmFence has a minimum 230 grams/sqm zinc coating making it far superior to standard galvanised wire which is only 40 grams/sqm of zinc. The strong square knot that locks the vertical and horizontal wires together reduces the risk of the wires slipping compared to products like ring joint. FarmFence also has a 'one piece' vertical wire meaning it does not need to be clipped to support wires like hinged joint.

For extra strength 2.80mm top and bottom wires see the Fastlock Toughline range on page 5. For the highest corrosion resistant wire see the Fastlock Premier50 range on page 6.

Southern Wire FarmFence offers:

- **Good Value** - Manufactured in Australia using high quality 2.50mm heavy galvanised wire.
- **Strength** - Square knot locks the vertical and horizontal wires to minimise the risk of wires sliding.
- **Stability** - One piece vertical wires to provide vertical integrity.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
7513	5/70/60	FarmFence	500	117	5
7515	5/70/45	FarmFence	200	53	9
7510	5/70/30	FarmFence	200	61	9
7509	5/70/30	FarmFence	500	152	4
7520	6/70/30	FarmFence	200	69	9
7522	6/70/30	FarmFence	500	173	4
7530	6/90/30	FarmFence	200	74	9
7531	6/90/30	FarmFence	500	186	4
7507	7/90/60	FarmFence	200	70	9
7508	7/90/60	FarmFence	500	174	4
7519	7/90/45	FarmFence	500	183	4
7505	7/90/30	FarmFence	200	83	9
7506	7/90/30	FarmFence	500	207	4
7540	8/90/30	FarmFence	200	91	9
7542	8/90/30	FarmFence	500	229	4
7538	8/80/15	FarmFence	100	60	9
7535	8/90/15	FarmFence	100	61	9





For WIRE SPACINGS

see page 36.



## Fastlock® Toughline

Fastlock Toughline is a high quality, Australian manufactured product designed to suit a wide range of fencing applications.

With extra strength 2.80mm high tensile top and bottom wires, Fastlock Toughline is designed to handle the pressure of animals trying to push under or lean over the fence. All wires are heavy galvanised (minimum 230 grams/sqm zinc coating) for superior longevity. The strong square knot which locks the vertical and horizontal wires together reduces the risk of the wires slipping compared to products like ring joint. Fastlock Toughline also has a 'one piece' vertical wire meaning it does not need to be clipped to support wires like hinged joint.

For the highest corrosion resistant wire see the Fastlock Premier50 range on page 6.

**Southern Wire Fastlock Toughline provides:**

- **Longevity** - Manufactured in Australia using high quality, heavy galvanised wire.
- **Durability** - 2.80mm high tensile top and bottom wires to manage heavy stock pressure.
- **Strength** - Square knot locks the vertical and horizontal wires to minimise the risk of wires sliding.
- **Stability** - One piece vertical wires to provide vertical integrity.
- **Easy to use** - Snag free rolls and compact knot means no-hassle unrolling and even wire tension.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
7020	6/70/30	Sheep, Lamb	200	73	9
7021	6/70/30	Sheep, Lamb	500	183	4
7033	6/90/45	Sheep, Cattle	500	172	4
7030	6/90/30	Sheep	200	78	9
7032	6/90/30	All Stock	500	195	4
7112	7/90/60	All Stock	500	182	4
7111	7/90/45	All Stock	500	193	4
7105	7/90/30	Intensive Stocking, Boundary	200	87	9
7106	7/90/30	Intensive Stocking, Boundary	500	217	4
7040	8/90/30	Boundary	200	95	9
7041	8/90/30	Boundary	500	238	4
7552	8/115/30	Boundary	200	102	9





For WIRE SPACINGS

see page 36.



## Fastlock® Premier50®

Fastlock Premier50 is designed specifically for the harshest of environments and sets an industry standard for superior wire longevity.

Originally developed for the aquaculture industry, the Premier50 wire coating technology provides farmers with the assurance that they are fencing for the future generations. Fastlock Premier50 combines this assurance with the strength of the Square Knot and 2.80mm high tensile top and bottom wires to create a premium, market leading fence. Whether fencing for higher pressure situations in high corrosion areas, or simply wanting to ensure the best fence possible is erected, Fastlock Premier50 is the preferred option.

Southern Wire Fastlock® Premier50® offers:

- **Extended Longevity** - Manufactured in Australia using Premier50 coated wire.
- **Durability** - 2.80mm high tensile top and bottom wires to manage heavy stock pressure.
- **Strength** - Square knot locks the vertical and horizontal wires to minimise the risk of wires sliding.
- **Stability** - One piece vertical wires to provide vertical integrity.
- **Easy to use** - Snag free rolls and compact knot means no-hassle unrolling and even wire tension.



CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
7630	5/70/30	Sheep, Tree Protection	500	161	4
7620	6/70/30	Sheep, Lamb, Tree Protection	200	73	9
7621	6/70/30	Sheep, Lamb, Tree Protection	500	183	4
7617	6/70/45	Sheep, Lamb, Tree Protection	250	86	9
7615	6/90/30	Sheep, Cattle	200	78	9
7616	6/90/30	Sheep, Cattle	500	195	4
7602	6/90/45	Sheep, Cattle	500	194	4
7600	7/90/30	All Stock	200	87	9
7601	7/90/30	All Stock	500	217	4
7605	8/90/30	Boundary	200	95	9
7204	8/90/30	Boundary	500	283	4
7610	8/90/15	Intensive Stocking, Boundary	100	63	9





For WIRE SPACINGS

see page 36.



**GRIPLOCK®  
FIXED KNOT**



## Griplock®

Griplock is made to withstand extreme pressure that would normally destroy hinged joint and ring joint fences.

High tensile line wires and one piece vertical wires are locked with the unique Fixed Knot, giving Griplock maximum resistance to impact damage. Manufactured using premium quality heavy galvanised wire (minimum 230 grams/sqm of zinc), farmers can be assured that their Griplock fence will be 'Stronger for Longer'.

Griplock is used in areas with significant vermin presence and by discerning landowners who believe in building fences right the first time. Toughline fences have extra strength 2.80mm top and bottom wires.

Southern Wire Griplock® offers:


- **Longevity** - Manufactured in Australia using high quality heavy galvanised wire.
- **Durability** - Toughline fences have 2.80mm top and bottom wires to manage heavy stock pressure.
- **Extreme Strength** - Super strong Griplock knot that eliminates the risk of the vertical wires slipping.
- **Stability** - One piece vertical wires to provide vertical integrity.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
6215	5/70/60	Griplock	400	130	5
6210	5/70/45	Griplock	250	70	9
6205	5/70/30	Griplock	200	65	9
6220	6/70/30	Griplock	200	75	9
6221	6/70/30	Griplock	400	146	4
6232	6/90/60	Griplock	400	158	5
6231	6/90/45	Griplock	250	86	5
6230	6/90/30	Griplock	200	80	9
6315	7/90/60	Griplock Toughline	200	76	9
6310	7/90/45	Griplock Toughline	200	82	9
6311	7/90/45	Griplock Toughline	400	218	4
6305	7/90/30	Griplock Toughline	200	94	9
6307	7/90/30	Griplock Toughline	400	188	4
6308	7/90/30	Griplock Toughline	400	236	3
6240	8/90/30	Griplock	200	101	9
6242	8/90/30	Griplock Toughline	400	209	4
6410	8/120/30	Griplock	200	108	9



For WIRE SPACINGS

see page 36.

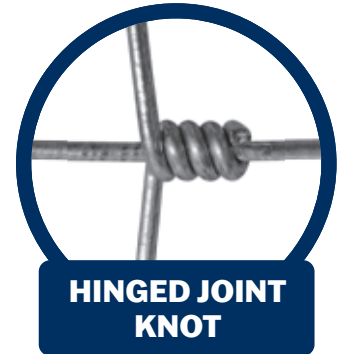

## Hinged Joint

Southern Wire's Hinged Joint is manufactured in Australia using high quality, heavy galvanised wire.

The Hinged Knot construction and two way tension crimps allows the fence to flex up over hills and down through valleys. The knot also means that should an animal or fallen tree crush the top of the fence it can be easily straightened back to its vertical position.

Southern Wire Hinged Joint Toughline offers:

- **Longevity** - Manufactured in Australia using high quality, heavy galvanised wire.
- **Durability** - All wires 2.50mm high tensile to manage stock pressure.
- **Flexibility** - Two way wire crimps and hinged knot construction allows it to follow contours.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
4009	6/50/15		200	86	9
2015	6/70/30	Sheep, Lamb	200	74	9
2020	6/70/30	Sheep, Lamb	500	185	4
2025	6/90/30		200	75	9
2030	7/90/30	All Stock	200	87	9
2035	7/90/30	All Stock	500	218	4
2040	8/90/15	Intensive Stocking, Boundary	100	63	9
2045	8/90/30	Boundary	200	96	9





## Fastlock® HorseFence & YardFence

Fastlock HorseFence is manufactured in Australia and designed to be a safe and secure fencing option for equine properties. It is used widely on horse studs throughout North America, Europe and Australia.

The high tensile, heavy galvanised horizontal wires have crimps or bends in the wire at 15cm intervals allowing the fence to absorb pressure should an animal lean against it. Once the animal is off the fence, the high tensile wire will return to its original position. This compares to other horse fence products which are made from soft wire and therefore tend to sag over time.

The knot used to secure the horizontal and vertical wires is smooth on both sides to prevent injury when animals rub against the fence. The closely spaced 5cm wide and 10cm high wire openings prevent horses from stepping through or becoming tangled in the fence minimising the risk of serious injury.

The 90cm and 120cm high sizes are available in 100m rolls to reduce the number of joins required when fencing long sections.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
7113	10/90/5	Horse	50	70	5
7117	10/90/5	Horse	100	140	3
7200	13/120/5	Horse	50	90	5
7209	13/120/5	Horse	100	180	3
7205	16/150/5	Horse	50	110	5
7215	19/180/5	Horse	50	130	5

## Fastlock YardFence

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
711	10/90/10	YardFence	100	88	5
7110	13/120/10	YardFence	100	115	5



For WIRE SPACINGS

see page 13.



## Fastlock® Vermin

The Southern Wire Fastlock Vermin range is specially engineered to provide the easiest and most effective option for vermin exclusion fencing.

Developed in conjunction with landowners and government departments, Fastlock Vermin is constructed with one piece vertical wires and the strong Fastlock knot to ensure it will withstand pressure from the most determined of animals. It is also available in some sizes with a hinged footer section that is machine knotted to the base of the fence, offering a fully integrated barrier against kangaroos, wallabies, wombats and wild dogs.

Southern Wire Fastlock® Vermin offers:

- **Longevity** - Manufactured in Australia using high quality, heavy galvanised wire.
- **Strength** - FarmFence knot to minimise the risk of the vertical wire slipping.
- **Stability** - Single picket wire to provide long-lasting vertical integrity.
- **Durability** - Optional hinged footer to prevent vermin from pushing under the fence.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
7546	5/40/15	Fastlock	250	84	8
7035	8/90/15	Fastlock	100	63	9
7037	8/90/15	Fastlock	250	156	4
7551	11/90/15	Fastlock	100	78	9
7625	11/90/15	Fastlock Premier50	100	78	9
7115	13/90/15	Fastlock	100	87	9
7553	8/115/15	Fastlock	100	69	9
7562	11/115/15	Fastlock	250	208	4
7549	12/115/15	Fastlock	250	220	4
7118	13/115/15	Fastlock	100	93	9
7255	15/150/15	Fastlock	100	111	9
7257	15/150/15	Fastlock	250	278	4





## Fastlock plus Apron Vermin Fencing

Over the past 10 years, Southern Wire has supplied 1000's of kilometres of vermin exclusion fencing to the Western Queensland and Western New South Wales regions. Some of the common sizes can be found below, however Southern Wire has the ability to manufacture a fence to your exact requirement ensuring the fence does not cost you more than it needs to suit your application.

- Customisable wire configurations to suit your application.
- Available in 250m or 500m rolls to reduce wire joining.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
7541F	8/90/30	Fastlock plus 30cm Barbed Hinged Apron	200	139	9
7532	8/90/15	Fastlock plus 30cm Barbed Hinged Apron	250	217	4
7551F	11/90/15	Fastlock plus 30cm Hinged Apron	100	106	9
7558F	11/90/15	Fastlock plus 30cm Non Barbed Hinged Apron	250	265	4
7558	11/90/15	Fastlock plus 30cm Double Barbed Hinged Apron	250	265	4
7625F	11/90/15	Fastlock Premier50 plus 30cm Barbed Hinged Apron	100	100	9
7626F	11/90/15	Fastlock Premier50 plus 30cm Barbed Hinged Apron	250	250	4
7577	8/115/15	Fastlock plus 30cm Barbed Hinged Apron	250	235	4
7555F	11/115/15	Fastlock plus 30cm Barbed Hinged Apron	250	267	4
7549F	12/115/15	Fastlock plus 30cm Barbed Hinged Apron	250	279	4
7566	12/135/15	Fastlock plus 30cm Barbed Hinged Apron	250	308	4
7421	13/150/15	Fastlock plus 30cm Barbed Hinged Apron	250	313	4
7419	13/150/15	Fastlock plus 30cm Barbed Hinged Apron	500	626	1
7259F	15/150/15	Fastlock plus 30cm Barbed Hinged Apron	100	135	9
7255F	15/150/15	Fastlock plus 30cm Barbed Hinged Apron	250	336	4
7254	15/150/15	Fastlock plus 30cm Barbed Hinged Apron	500	672	1
7418	16/180/15	Fastlock including 30cm Radius Apron	250	311	4
7574F	17/180/15	Fastlock plus 30cm Barbed Hinged Apron	250	382	4





For WIRE SPACINGS

see page 13.



## Griplock® Vermin

Griplock provides the ultimate in exclusion fencing for exotic animals and vermin. Manufactured with all wires 100% high tensile and heavy galvanised, they combine the best features of strength, corrosion resistance and purpose built design.

Due to the strength and durability, these Griplock fences are commonly specified by government departments for vermin fencing and are also the fence of choice for regional airstrips. With the widest range of high fences available, you can be assured that there will be a Griplock fence to suit your specific application.

Southern Wire Griplock® Vermin offers:

- **Longevity** - Manufactured in Australia using high quality, heavy galvanised wire.
- **Strength** - Super strong Griplock knot that eliminates the risk of the vertical wires slipping.
- **Stability** - Able to withstand extreme vermin pressure.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
6235	8/90/15	Griplock	100	70	9
6238	8/90/15	Griplock Toughline	200	146	4
6415	10/110/15	Griplock	100	87	9
6406	8/120/15	Griplock	100	77	9
6435	15/150/15	Griplock	100	129	5
6437	15/150/15	Griplock	250	331	4
6440	15/150/30	Griplock	200	187	5
6425	13/190/15	Griplock	100	120	9
6430	13/190/30	Griplock	200	176	5
6445	17/190/15	Griplock	100	152	5
6450	17/190/30	Griplock	200	217	5
6455	20/240/15	Griplock	100	183	5
6460	20/240/30	Griplock	100	130	5





## Griplock Including Apron Vermin

The Griplock with Radius Apron has what is widely regarded as the strongest fencing knot on the market. It is designed to withstand the extreme pressure placed on fences that are in an area with significant vermin presence.

The wire spacings of the 16/180/15 Griplock allow the bottom 300mm section to be radiused onto the ground to prevent animals from being able to push under the fence.

This product comes standard with 2.8mm wires at the top and bottom as well as where the fence is radiused to create the apron. Additional 2.8mm wires can be added to the fence on request.

### Product Features:

- Griplock fixed knot – stands up to extreme vermin pressure.
- All wires heavily galvanised.
- 2.8mm wires at the top, bottom and edge of the apron.
- Additional 2.8mm wires available on request.
- Available in 250m and 500m rolls.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
6428	14/145/15	Griplock including 30cm Radius Apron	500	630	1
6446	16/180/15	Griplock including 30cm Radius Apron	250	364	3
6444	16/180/15	Griplock including 30cm Radius Apron	500	729	1
6453	20/210/15	Griplock including 30cm Radius Apron	250	457	3





**WIRE  
NETTING**



## Wire Netting

Southern Wire Netting is a premium quality netting designed to effectively exclude vermin as well as control stock.

Choose our heavy galvanised netting for maximum durability and longevity. It lasts up to 6 times longer life than standard galvanised netting.



### Southern Wire Netting offers:

- **Longevity** - Heavy galvanised netting is made from 1.4mm heavy galvanised wire.
- **Stability** - Twin selvedge wires for ease of tensioning and extra strength.
- **Efficiency** - Larger core to minimise end of roll wastage and allow for easy unrolling.

CODE	PRODUCT	DESCRIPTION	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
<b>HEAVY GALVANISED WIRE NETTING</b>					
9125	30/4/1.4mm	Rabbit	50	14	32
9101	30/4/1.4mm	Rabbit	100	28	18
9126	60/4/1.4mm	Rabbit	50	26	16
9116	60/4/1.4mm	Rabbit	100	51	9
9103	90/4/1.4mm	Rabbit	50	38	16
9105	90/4/1.4mm	Rabbit	100	75	9
9107	105/4/1.4mm	Rabbit	50	44	16
9109	105/4/1.4mm	Rabbit	100	87	9
9124	120/4/1.4mm	Rabbit	50	51	16
9117	120/4/1.4mm	Rabbit	100	102	9
9102	180/4/1.4mm	Rabbit	50	75	16
9118	180/4/1.4mm	Rabbit	100	150	9
<b>STANDARD GALVANISED WIRE NETTING</b>					
9111	90/5/1.0mm	Chicken	50	14	25
9113	180/5/1.0mm	Chicken	50	28	20





## Barbed Wire

Southern Wire's range of high tensile, reverse twist barbed wire offers the full range of sizes from 1.57mm through to the traditional 2.50mm Iowa.

The economy barbed wire is wound on a wooden spool with a wire handle, whilst the premium barbed wire has a user friendly material handle and heavy duty spool.



### HIGH TENSILE BARBED WIRE



### IOWA BARBED WIRE



CODE	PRODUCT	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
8407	1.57mm Heavy Galv High Tensile Barbed Wire	500	24	32
8417	1.80mm Heavy Galv High Tensile Barbed Wire	500	28	27
8427	1.80mm Heavy Galv High Tensile Barbed Wire	5000	280	1
8418	2.00mm Heavy Galv High Tensile Barbed Wire	500	35	27
8428	2.00mm Heavy Galv High Tensile Barbed Wire	500	35	27
8426	2.00mm Heavy Galv High Tensile SAVAGE Barbed Wire	500	38	27
8421	1.80mm Premier50 High Tensile Barbed Wire	500	28	27
8419	1.80mm 316 Stainless Steel Barbed Wire	500	28	27
8430	2.50mm Heavy Galv Iowa Barbed Wire	400	45	27
8423	2.50mm Standard Galv Iowa Barbed Wire	400	45	27





## Fencing Wire

Southern Wire offers a full range of heavy galvanised plain wires to support our pre-fabricated fence range.

The FlexiWire and StrongWire are appropriate for most fence building requirements, with a range of other wires from 2.0mm to 4.0mm available for special projects.

Selected sizes of Plainwire is available in the unique Reel Easy 1500m coils. The Reel Easy coils have had exceptional take up across Australia as they largely eliminate tangles and dispensing issues that are common with the traditional rolls. They can be particularly useful when erecting multiple strands of Plainwire which is common in many areas across Australia.



View the **Reel-Easy** video at:  
[www.southernwire.com.au](http://www.southernwire.com.au)

CODE	PRODUCT	UOM	LENGTH (m)	WEIGHT (kg)	LENGTHS PER PACK
7051	2.50mm Cut Length Tie Wires, Heavy Galvanised – 250mm	Box		5	Approx. 500

CODE	PRODUCT	UOM	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
8303	2.00mm TieWire, Soft Tensile, Heavy Galvanised	Coil	200	5	1
8205	2.50mm FenceWire, Soft Tensile, Heavy Galvanised	Coil	1300	50	10
8215	3.15mm FenceWire, Soft Tensile, Heavy Galvanised	Coil	750	46	10
8220	4.00mm FenceWire, Soft Tensile, Heavy Galvanised	Coil	500	49	10
8001	2.50mm FlexiWire, Medium Tensile, Heavy Galvanised	Handy Coil	300	12	10
8006	2.50mm FlexiWire, Medium Tensile, Heavy Galvanised	Coil	1500	58	10
8006S	2.50mm FlexiWire, Medium Tensile, Heavy Galvanised	Reel-Easy	1500	61	18
8105	2.50mm StrongWire, High Tensile, Heavy Galvanised	Coil	1500	58	10
8105S	2.50mm StrongWire, High Tensile, Heavy Galvanised	Reel-Easy	1500	61	18
8110	2.80mm StrongWire, High Tensile, Heavy Galvanised	Coil	1000	48	10
8110S	2.80mm StrongWire, High Tensile, Heavy Galvanised	Reel-Easy	1000	51	18
8320	5.5mm White HorseWire	Roll	400	43	10





## Plain Wire Premier50

In a world first for the rural and viticulture industries, Southern Wire introduces the Premier50 coating on our range of PlainWire fencing products.

The Premier50 coating was developed for the aquaculture industry where it is used in the harshest ocean environments. Southern Wire has taken this technology and applied it to its rural fencing products to ensure that the Plainwire Premier50 is the product of choice for farmers and growers across Australia.

Selected sizes of Plainwire Premier50 is available in the unique Reel Easy 1500m coils. The Reel Easy coils have had exceptional take up across Australia as they largely eliminate tangles and dispensing issues that are common with the traditional rolls. They can be particularly useful when erecting multiple strands of Plainwire which is common in many areas across Australia.

CODE	PRODUCT	UOM	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
<b>PLAINWIRE PREMIER50 - Premier50 Coated</b>					
8007	2.50mm FlexiWire, Medium Tensile	Coil	1500	58	10
8007S	2.50mm FlexiWire, Medium Tensile	Reel-Easy	1500	61	18
8107	2.50mm StrongWire, High Tensile	Coil	1500	58	10
8107S	2.50mm StrongWire, High Tensile	Reel-Easy	1500	61	18
8111	2.80mm VinWire, High Tensile	Coil	1000	48	10
8111S	2.80mm VinWire, High Tensile	Reel-Easy	1000	51	18

## Trellising Wire Premier 50

Southern Wire has a range of Trellis Wires both in the traditional heavy galvanised wire coating (minimum 230 grams/sqm zinc) and also in the revolutionary Premier50 wire coating.

The trellis wire is also available in some sizes on the time saving Reel Easy Spools.

CODE	PRODUCT	UOM	LENGTH (m)	WEIGHT (kg)	ROLLS PER PALLET
<b>VINWIRE - Heavy Galvanised</b>					
8200	2.00mm VinWire	Reel-Easy	4000	99	9
8315	2.65mm VinWire	Coil	1000	43	10
8315S	2.65mm VinWire	Reel-Easy	1000	46	18
8110	2.80mm VinWire	Coil	1000	48	10
8110S	2.80mm VinWire	Reel-Easy	1000	51	18
8216	3.15mm VinWire	Coil	1000	60	10
8216S	3.15mm VinWire	Reel-Easy	1000	63	18
<b>VINWIRE PREMIER50</b>					
8202	2.00mm VinWire	Coil	2000	50	10
8313	2.65mm VinWire	Coil	1000	43	10
8313S	2.65mm VinWire	Reel-Easy	1000	46	18
8111	2.80mm VinWire	Coil	1000	48	10
8111S	2.80mm VinWire	Reel-Easy	1000	51	18
8217	3.15mm VinWire	Coil	1000	61	10







## Steel Fence Posts

Southern Wire's range of steel posts are manufactured according to our exact specification. Rolled from high quality steel billet, the heavy weight posts are precision cut to ensure they do not twist and turn as they are driven into the ground. Uniform holes are then simultaneously punched for uniformity and consistency. The post are available with a black bituminous coating or hot dip galvanised for extended longevity.


### STEEL POST HOLE SPACINGS

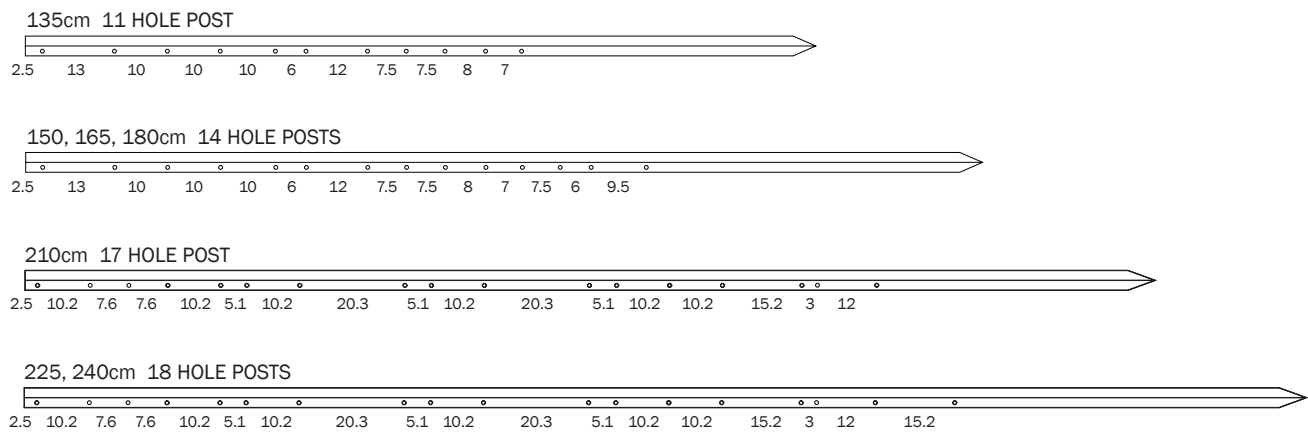

**HEAVY DUTY**  
**STEEL POST**



**EXTRA HEAVY DUTY**  
**STEEL POST**





# YOUR FENCING PARTNER



Heavy Duty Black Steel Posts



Heavy Duty Galvanised Steel Posts



CODE	PRODUCT	WEIGHT (kg)	POSTS PER SLING
<b>HEAVY DUTY BLACK STEEL POSTS</b>			
8510	150cm Heavy Duty Black Steel Post	2.8	200
8515	165cm Heavy Duty Black Steel Post	3.1	200
8516	165cm Heavy Duty Black Steel Post - NT	3.1	200
8520	180cm Heavy Duty Black Steel Post	3.4	200
8526	210cm Heavy Duty Black Steel Post	3.9	200
8527	225cm Heavy Duty Black Steel Post	4.2	200
8525	240cm Heavy Duty Black Steel Post	4.5	200
<b>HEAVY DUTY GALVANISED STEEL POSTS</b>			
8535	135cm Heavy Duty Galvanised Steel Post	2.6	200
8560	150cm Heavy Duty Galvanised Steel Post	2.8	200
8565	165cm Heavy Duty Galvanised Steel Post	3.1	200
8570	180cm Heavy Duty Galvanised Steel Post	3.4	200
8532	210cm Heavy Duty Galvanised Steel Post	3.9	200
8595	240cm Heavy Duty Galvanised Steel Post	4.5	200
<b>EXTRA HEAVY DUTY BLACK STEEL POSTS</b>			
8521	180cm EXTRA Heavy Duty Black Steel Post	5.4	100
8544	210cm EXTRA Heavy Duty Black Steel Post	6.3	100
8529	240cm EXTRA Heavy Duty Black Steel Post	7.2	100
<b>EXTRA HEAVY DUTY GALVANISED STEEL POSTS</b>			
8548	180cm EXTRA Heavy Duty Galvanised Steel Post	5.4	100
8549	210cm EXTRA Heavy Duty Galvanised Steel Post	6.3	100
8360	240cm EXTRA Heavy Duty Galvanised Steel Post	7.2	100
8552	270cm EXTRA Heavy Duty Galvanised Steel Post	8.1	100

## Rapid Clips

Scan to watch the Rapid Post video:



CODE	PRODUCT	WEIGHT (kg)	CLIPS PER BOX
8776	Rapid Clips	0.4	50
8782	Rapid Clips	2.0	250
8783	Rapid Clips	7.0	1000

EMAIL [enquiries@southernwire.com.au](mailto:enquiries@southernwire.com.au)







## Strainer Assemblies


Heavy duty galvanised steel strainer assemblies take the effort out of fencing and guarantee your fence will still be standing in twenty years time.

The most popular strainer, the 80/40 Tubular Strainer is concreted into the ground, while the Drive-In End assembly is simply driven into the ground. All strainers are manufactured from heavy duty steel, unlike other brands.

Tubular Strainer 80/40 Heavy Duty



Drive-In End Assembly

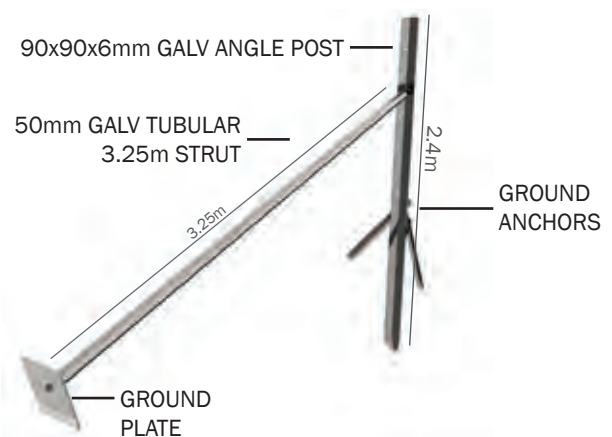





## Rapid Stay Strainer Assemblies

The Southern Wire Rapid Stay Assembly is designed for both steel and wooden strainer posts.

Included in the easy-to-install assembly is a 50mmNB MED Wall galvanised stay pipe which connects to a hot-dip galvanised, 6mm steel ground engagement plate. The front and back edges turn down 20mm making it cut into the ground and provide a more secure footing. M12 threaded rod connects the ground plate to the base of the strainer post. There is provision to drive star pickets (not included) through the ground plate to prevent movement in sandy soils.

The 80mmNB MED Wall Strainer Post has predrilled holes for the stay pipe and threaded rod tieback. Lugs at ground level allow star pickets to be driven at 45 degrees into the ground for increased stability.

2.5m posts are also available to suit fences up to 1.6m high or achieve greater in-ground depth.

CODE	PRODUCT	WEIGHT (kg)
<b>RAPID STRAINER ASSEMBLIES – Strong and simple to use – ALL Steel</b>		
8618	80mm MED Strainer Post to suit Rapid Stay @ 2.1m	19
8621	50mm Rapid Stay Assembly @ 3m inc. Steel Footplate and Tieback	16
<b>TUBULAR STEEL STRAINER ASSEMBLIES - All Heavy Grade Pipe</b>		
8605	80/40 Tubular Strainer Assembly - 2.1m post & 2.1m strut	27
G80M21C	80mm Strainer Post and Cap	18
8610	Extra 2.1m strut & fitting to suit 8605	8
8611	Extra 3.25m strut & fitting to suit 8605	12
8612	80/40 Tubular Strainer Assembly - 2.6m post & 3.25m strut	34
8613	Extra 3.25m strut & fitting to suit 8612	12
<b>DRIVE-IN STRAINER ASSEMBLIES</b>		
8615	2.4m Drive-In End Assembly	39
8616	2.1m Drive-In End Assembly	36
8620	Extra strut to suit Drive-In End Assembly	10




## Farm Gates

Southern Wire manufactures an extensive range of heavy duty galvanised farm gates with 1.2m high fully welded pipe frames, vertical or vee bracing and 150mm x 100mm galvanised weldmesh as standard. Available with a range of Elgate farm gate fittings packs or the popular welded on Brooker galvanised hinge fittings.


### Farm Gates provides:

- **Strength** - Profile cut pipe ends for extra strength welds.
- **Quality** - Fully automated fabrication for quality and consistency.
- **Durability** - Australian made to handle Australian conditions.


Vertical Brace Plain




Vertical Brace with Brooker



Vee Brace Plain



Vee Brace with Brooker




## Farm Gates for Western Australia

PRODUCT	VERTICAL BRACE CODE	VEE BRACE CODE	N BRACE CODE	WEIGHT (kg)	QTY PER PALLET
<b>FARM GATES – PLAIN - 150mm x 100mm Mesh</b>					
1.0m Farm Gate w/collars	8803	-	-	14	10
1.2m Farm Gate w/collars	8801C	-	-	22	10
1.5m Farm Gate w/collars	8802C	-	-	16	10
1.8m Farm Gate w/collars	8806C	-	-	22	10
2.4m Farm Gate w/collars	8804	8804C	-	22	10
3.0m Farm Gate w/collars	8809	8809C	8811	27	10
3.6m Farm Gate w/collars	8814	8814C	8816	31	10
4.2m Farm Gate w/collars	8819	8819C	8821	34	10
4.8m Farm Gate w/collars	8824	8824C	8824N	38	10
6.0m Farm Gate w/collars	8892	-	-	62	10
<b>FARM GATES – WITH BROOKER HINGE FITTINGS - 150mm x 100mm Mesh</b>					
1.0m Farm Gate w/Brooker	8800	-	-	14	10
1.2m Farm Gate w/Brooker	8801	-	-	22	10
1.5m Farm Gate w/Brooker	8802	-	-	22	10
1.8m Farm Gate w/Brooker	8806	-	-	22	10
2.4m Farm Gate w/Brooker	8805	8807	-	22	10
3.0m Farm Gate w/Brooker	8810	8812	8811NB	27	10
3.6m Farm Gate w/Brooker	8815	8817	8816NB	31	10
4.2m Farm Gate w/Brooker	8820	8822	8821NB	34	10
4.8m Farm Gate w/Brooker	8825	8827	8824NB	38	10
5.4m Farm Gate w/Brooker	-	-	8894NB	44.4	10
6.0m Farm Gate w/Brooker	8893	-	8895NB	62	10



## Cattle Gates


Southern Wire custom manufacturers heavy duty cattle gates using 32mm galvanised pipe. Choose these gates for high pressure situations.

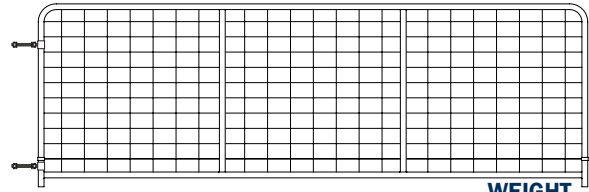

CODE	PRODUCT	WEIGHT (kg)
<b>CATTLE GATES – WITH BROOKER HINGE FITTINGS - Heavy Duty 32NB Pipe, 1200mm High</b>		
8852	3.0m (10ft) opening	11
8853	3.6m (12ft) opening	13
8823	4.2m (14ft) opening	34
8854	4.8m (18ft) opening	34
8869	6.0m (20ft) opening	56
CODE	PRODUCT	WEIGHT (kg)
<b>5 BAR CATTLE GATES – PLAIN - 32mm NB, 1200mm High</b>		
8855A	3.0m (14ft) actual	20
8856A	3.6m (12ft) actual	23
8858A	4.2m (14ft) actual	26
8859A	4.8m (16ft) actual	29

## Horse Gates

Southern Wire horse gates are heavy duty three bar gates manufactured from 32NB pipe. Height is 900mm and they are generally installed approximately 300 - 400mm above the ground to prevent horses from sustaining any injury.

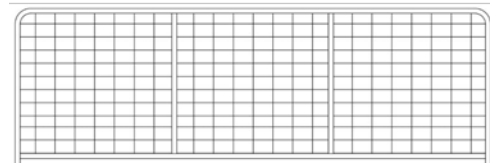


CODE	PRODUCT	WEIGHT (kg)
<b>HORSE GATES – WITH BROOKER HINGE FITTINGS - Heavy Duty 32NB Pipe, 900mm High</b>		
8833	1.8m (6ft) actual	17
8832	2.4m (8ft) actual	22
8834	3.0m (10ft) actual	27
8835	3.6m (12ft) actual	31
8857	4.2m (14ft) actual	36
CODE	PRODUCT	WEIGHT (kg)
<b>HORSE GATES WITH MESH- 50x100mm Mesh with collars</b>		
8803AH	1.0m actual	12
8801AH	1.2m actual	14
8802AH	1.5m actual	16
8806AH	1.8m actual	19
8804AH	2.4m actual	26
8809AH	3.0m actual	31
8814AH	3.6m actual	38
8819AH	4.2m actual	43
8824AH	4.8m actual	47



## Vermin Exclusion Gates

Southern Wire custom manufacturers heavy duty vermin gates using 25mm galvanised pipe. Choose these gates to complement your vermin exclusion fencing.

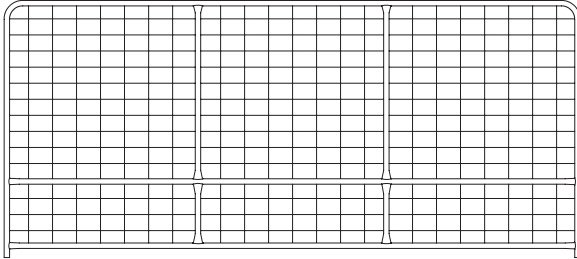


CODE	PRODUCT	WEIGHT (kg)
<b>VERMIN GATES – PLAIN - 25mm NB, 1600mm High</b>		
8862	2.4m (12ft) actual	25
8868	3.0m (14ft) actual	31
8863	3.6m (12ft) actual	38
8864	4.2m (14ft) actual	44
8865	4.8m (16ft) actual	50


## Gate Fittings

CODE	PRODUCT	DESCRIPTION
<b>GATE FITTINGS</b>		
8905	FGP2 Fittings Pack	Screw-In Hinge Strap and Bottom Gudgeon
FGP7	FGP7 Fittings Pack	Screw-In Hinge Strap and Bottom Gudgeon
8910	FGP4 Fittings Pack	Bolt-Thru Hinge Strap and Bottom Gudgeon
8915	FGP20 Fittings Pack	Bolt-On Brooker Hinge
8932	32nb Bolt on Brooker Pack	Bolt-On for Collar Gates, Latches included
SH8025	SH8025 Hinge	
SH8032	SH8032 Hinge	
DGCLI	Double Gate Chain Latch	
CAC1	Screw-In Ring Chain Latch	


**8905 FGP2 Fittings Pack**



**8910 FGP4 Fittings Pack**



**8915 FGP20 Fittings Pack**






## Farm Gates for South Australia, Victoria, New South Wales, Queensland, Northern Territory

Southern Wire manufactures an extensive range of heavy duty galvanised farm gates with 1.2m high fully welded pipe frames, vertical or vee bracing and 150mm x 100mm galvanised weldmesh as standard. Available with a range of Elgate farm gate fittings packs or the popular welded on Brooker galvanised hinge fittings.


### Farm Gates provides:

- **Strength** - Profile cut pipe ends for extra strength welds.
- **Quality** - Fully automated fabrication for quality and consistency.
- **Durability** - Australian made to handle Australian conditions.

Vertical Brace

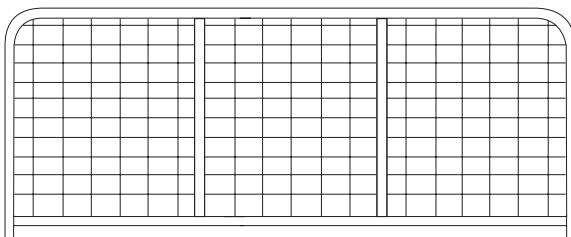

"N" Brace

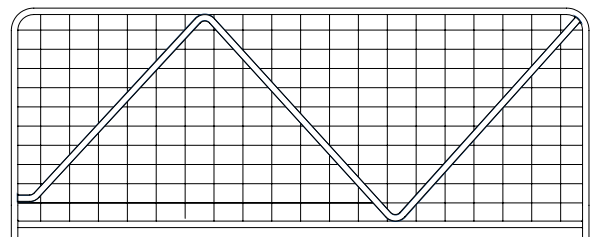

PRODUCT	VERTICAL BRACE		'N' BRACE	
	CODE	WEIGHT (kg)	CODE	WEIGHT (kg)
<b>FARM GATES – PLAIN - 150mm x 100mm Mesh</b>				
0.8m actual	8849	15	-	-
1.0m (3ft) actual	8803A	14	-	-
1.2m (4ft) actual	8801A	15	-	-
1.5m (5ft) actual	8802A	16	-	-
1.8m (6ft) actual	8806A	17	-	-
2.4m (8ft) actual	8804A	22	-	-
3.0m (10ft) actual	8809A	27	8808N	30
3.6m (12ft) actual	8814A	31	8813N	34
4.2m (14ft) actual	8819A	34	8818N	37
4.8m (16ft) actual	8824A	38	8826N	41
5.4m (18ft) actual	-	-	8828N	45
6.0m (20ft) actual	-	-	8829N	49

CODE	PRODUCT	WEIGHT (kg)
<b>CATTLE GATES – PLAIN - Heavy Duty 32mm NB Pipe, 1200mm High</b>		
8852A	3.0m (10ft) actual	31
8853A	3.6m (12ft) actual	37
8823A	4.2m (14ft) actual	44
8854A	4.8m (18ft) actual	50





## Sheepyard Mesh

Quality locally manufactured galvanised sheepyard mesh available in 6.0m sheets.

CODE	PRODUCT	DESCRIPTION	WEIGHT (kg)
<b>SHEEPYARD WELDED MESH SHEETS - Galvanised</b>			
9005	SWSM Red 6.0m x 0.9m	150mm x 100mm – 5.0mm Wire	15.0
9010	SWSM Red 6.0m x 1.1m	150mm x 100mm – 5.0mm Wire	18.0
9015	SWSM Blue 6.0m x 0.9m	250mm x 100mm – 5.0mm Wire	13.5
9020	SWSM Blue 6.0m x 1.1m	250mm x 100mm – 5.0mm Wire	16.0

## TieWire

CODE	PRODUCT	WEIGHT (kg)
7002	2.00mm PVC Green Lacing/Tiewire (31m/kg)	5 (minimum)
70005	2.00mm Heavy Galvanised Lacing/Tiewire (200m/5kg)	5 (minimum)
70015	2.00mm PVC Black Lacing/Tiewire (155m/5kg)	5 (minimum)

## CableWire

CODE	PRODUCT	WEIGHT (kg)
7003	3.15mm Heavy Galvanised Cable Wire (16.2m/kg)	5 (minimum)
7004	3.15mm PVC Black Cable Wire (14.5m/kg)	5 (minimum)
7005	3.15mm PVC Green Cable Wire (14.5m/kg)	5 (minimum)

## Helicoil

CODE	PRODUCT	WEIGHT (kg)
7006	4.00mm Heavy Galvanised Helicoil (10.2m/kg)	25 or 50
7007	4.00mm PVC Green Helicoil (9m/kg)	25 or 50
7008	4.00mm PVC Black Helicoil (9m/kg)	25 or 50





## Chainmesh

Southern Wire offers a wide range of chainmesh options to suit a variety of fencing applications. This includes galvanised or PVC coated chainmesh, galvanised pipe, gates and the full range of fittings.

3.15mm chainmesh also available on request.

CODE	PRODUCT	ROLL LENGTH (m)	WEIGHT (kg)
<b>HEAVY GALVANISED CHAINMESH</b>			
3190	900 x 50 x 2.50mm	15	21
3111	1050 x 50 x 2.50mm	15	27
3112	1200 x 50 x 2.50mm	15	30
3115	1500 x 50 x 2.50mm	15	37
3118	1800 x 50 x 2.50mm	15	44
3121	2100 x 50 x 2.50mm	15	52
3124	2400 x 50 x 2.50mm	15	57
3130	3000 x 50 x 2.50mm	10	48
3136	3600 x 50 x 2.50mm	10	57
<b>BLACK PVC COATED CHAINMESH</b>			
3290	900 x 50 x 2.50mm	15	26
3211	1050 x 50 x 2.50mm	15	32
3212	1200 x 50 x 2.50mm	15	35
3215	1500 x 50 x 2.50mm	15	43
3218	1800 x 50 x 2.50mm	15	51
3221	2100 x 50 x 2.50mm	15	60
3224	2400 x 50 x 2.50mm	15	68
3230	3000 x 50 x 2.50mm	10	67
3236	3600 x 50 x 2.50mm	10	68



## Galvanised Pipe

PIPE DESCRIPTION	kg/m	1050mm CHAINMESH ONLY		1200mm CHAINMESH ONLY		1500mm CHAINMESH ONLY	
		CODE	LENGTH (mm)	CODE	LENGTH (mm)	CODE	LENGTH (mm)
32mm NB XL Plain End	2.1	G32X16	1600	G32X18	1800	G32X21	2100
32mm NB XL Plain Capped	2.1	G32X16C	1600	G32X18C	1800	G32X21C	2100
40mm NB XL Plain End	2.7	G40X16	1600	G40X18	1800	G40X21	2100
40mm NB XL Plain Capped	2.7	G40X16C	1600	G40X18C	1800	G40X21C	2100
50mm NB XL Plain End	3.4	G50X16C	1600	G50X18C	1800	G50X23C	2300
50mm NB XL Plain Capped	5.0	G50M16C	1600	G50M18C	1800	G50M23C	2300

PIPE DESCRIPTION	kg/m	CHAINMESH ONLY		CHAINMESH plus 3 rows of barbed wire - straight posts		CHAINMESH plus 3 rows of barbed wire - cranked posts	
		CODE	LENGTH (mm)	CODE	LENGTH (mm)	CODE	LENGTH (mm)
1800MM CHAINMESH							
32mm NB XL Capped	2.1	G32X24C	2400	G32X29CD	2900	G32X29CDB	2900
32mm NB MED Capped	3.1	G32M24C	2400	G32M29CD	2900	G32M29CDB	2900
40mm NB XL Capped	2.7	G40X24C	2400	G40X29CD	2900	G40X29CDB	2900
40mm NB MED Capped	3.6	G40M24C	2400	G40M29CD	2900	G40M29CDB	2900
50mm NB XL Capped	3.4	G50X26C	2600	G50X32CD	3200	G50X32CDB	3200
50mm NB MED Capped	5.0	G50M26C	2600	G50M32CD	3200	G50M32CDB	3200
80mm NB MED Capped	8.4	G80M26C	2600	G80M32CD	3200	G80M32CDB	3200

PIPE DESCRIPTION	kg/m	CODE	LENGTH (mm)
<b>STRUTS &amp; RAILS</b>			
32mm NB XL Diagonal Strut	2.1	G32X32BB	3200
32mm NB XL Rail	2.1	G32X32	3200
32mm NB XL Rail	2.1	G32X40	4000
32mm NB XL Swaged Top Rail	2.1	G32X65S	6500
32mm NB MED Diagonal Strut	3.1	G32M32BB	3200
32mm NB MED Rail	3.1	G32M32	3200
32mm NB MED Rail	3.1	G32M40	4000
40mm NB XL Diagonal Strut	2.7	G40X32BB	3200
40mm NB XL Rail	2.7	G40X32	3200
40mm NB XL Rail	2.7	G40X40	4000
40mm NB XL Swaged Top Rail	3.4	G40X65S	6500
40mm NB MED Diagonal Strut	5.0	G40M32BB	3200

## Yard Building

CODE	PRODUCT	WEIGHT (kg)	QTY PER PALLET
9011	R1100 Sheepyard Mesh Roll, 150x100mm - 30m	90	4
CATRAIL20.5MM	Cattle Rail 115x42x2.50mm Galvanised 6.1m	32	21
CATRAIL2.0MM	Cattle Rail 115x42x2.00mm Galvanised 6.1m	26	21
B40M65	40NB MED Black Plain End Pipe @ 6500mm	24	61
B50M65	50NB MED Black Plain End Pipe @ 6500mm	33	37
B80M65	80NB MED Black Plain End Pipe @ 6500mm	56	19
G40M65	40NB NB MED Galv Plain End Pipe @ 6500mm	24	61
G50M65	50NB MED Galv Plain End Pipe @ 6500mm	33	37
G80M65	80NB MED Galv Plain End Pipe @ 6500mm		




## Chainmesh

CODE	PRODUCT	WEIGHT (kg)	QTY PER PALLET
7003	3.15mm Galv Cable Wire (16.2m/kg)	1	25
7004	3.15mm PVC Black Cable Wire (14.5m/kg)	1	25
7006	4.00mm Galv Helicoil (10.2m/kg)	1	25
7008	4.00mm PVC Black Helicoil (9m/kg)	1	25
70001	2.00mm Galv Lacing/Tie (200m/5kg)	1	5
70015	2.00mm PVC Black Lacing/Tiewire (155m/5kg)	1	5

## Chainmesh Gates

GATE DESCRIPTION (Gap Between Posts)	HEIGHT (mm)	1.8m Galvanised CHAINMESH ONLY	1.8m Black PVC CHAINMESH ONLY
		CODE	CODE
1000mm Personnel Chainmesh Gate	1750	IG1017G	IG1017B
3000mm Opening Double Chainmesh Gate	1750	IG3017G	IG3017B
4000mm Opening Double Chainmesh Gate	1750	IG4017G	IG4017B
5000mm Opening Double Chainmesh Gate	1750	IG5017G	IG5017B
6000mm Opening Double Chainmesh Gate	1750	IG6017G	IG6017B
7000mm Opening Double Chainmesh Gate	1750	IG7017G	IG7017B

GATE DESCRIPTION (Gap Between Posts)	HEIGHT (mm)	1.8m Galvanised CHAINMESH plus 3 rows of barbed wire	1.8m Black PVC CHAINMESH plus 3 rows of barbed wire
		CODE	CODE
1000mm Personnel Chainmesh Gate	2235	IG1022G	IG1022B
3000mm Opening Double Chainmesh Gate	2235	IG3022G	IG3022B
4000mm Opening Double Chainmesh Gate	2235	IG4022G	IG4022B
5000mm Opening Double Chainmesh Gate	2235	IG5022G	IG5022B
6000mm Opening Double Chainmesh Gate	2235	IG6022G	IG6022B
7000mm Opening Double Chainmesh Gate	2235	IG7022G	IG7022B

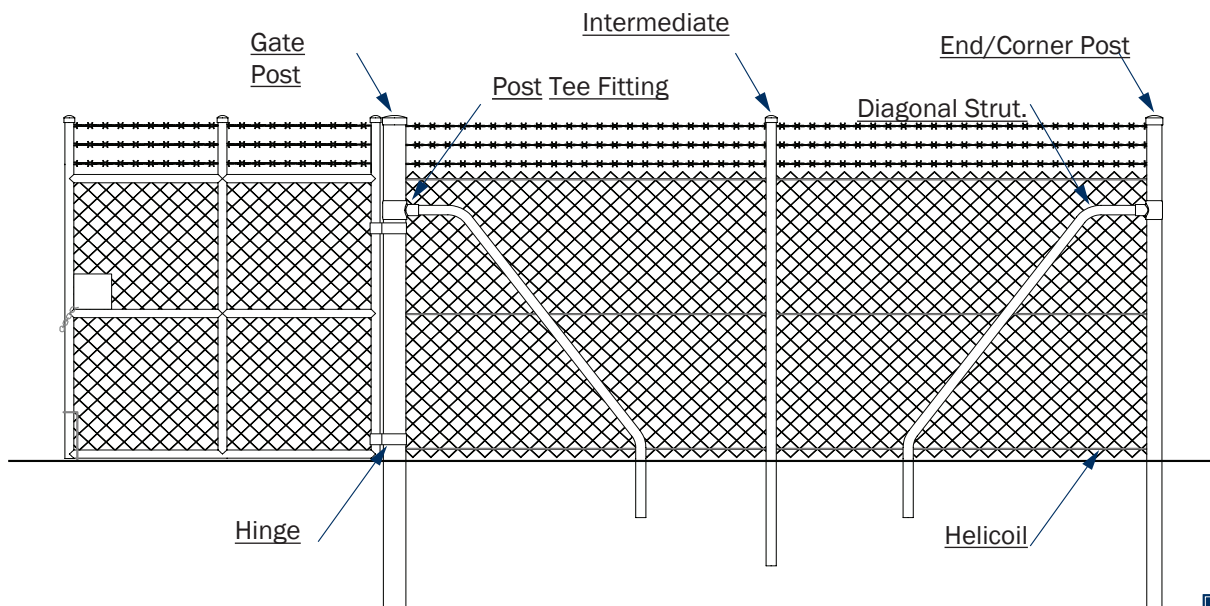



## Hinges & Pipe Fittings




THRU-BUTT	CTN	KG
<b>TEES</b>		
T2525	80	17
T2532	60	22
T2540	50	25
T3225	60	21
T3232	50	22
T3240	40	21
T3250	40	24
T4025	40	17
T4032	40	19
T4040	30	16
T4050	25	16
T5025	40	19
T5032	30	17
T5040	25	16
T5050	25	18
T8025	30	19
T8032	25	25
T8040	25	28
T8050	15	21
T10032	25	25



CODE	CTN	KG
<b>ROUND POST CAPS</b>		
K25	400	15
K32	200	12
K40	180	14
K50	120	12
K65	80	11
K80	50	9
K90	40	9
K100	40	11



POST-GATE	CTN	KG
<b>TWO PART HINGES</b>		
TH4025	32	18
TH4032	32	24
TH5025	32	20
TH5032	32	25
SH8025	24	21
SH8032	24	22
SH8040	24	23
SH10025	24	24
SH10032	24	25
SH10040	24	26

CODE	CTN	KG
<b>MULTI-PURPOSE FITTING SYSTEM</b>		
		
MPR32	40	13
MPR40	40	14
MPR50	40	17
MPR65	40	20
MPR80	20	12



MPC25	60	18
MPC32	60	20
MPC40	40	19



MPAC25	30	15
MPAC32	30	17
MPAC40	20	16



THRU-BUTT	CTN	KG
<b>CROSSES</b>		
X2525	50	18
X2532	30	15
X2540	30	14
X2550	25	18
X3232	30	19
X3240	30	22
X3250	20	16
X4040	20	15
X4050	20	17
X5050	15	17



THRU-BUTT	CTN	KG
<b>ADJUSTABLE CORNERS</b>		
AC2525	30	17
AC2532	30	19
AC2540	30	21
AC2550	20	16
AC3232	20	17
AC3240	16	14
AC3250	16	14
AC4040	16	15
AC4050	16	15
AC5050	12	15



## Tools and Accessories

Southern Wire has all the tools and accessories to erect a fence. Please contact us for more information and product details.

### CODE PRODUCT

#### WIRE DISPENSING

8712	3 Arm Folding Wire Jenny with Spike
8715	4 Arm Wire Jenny with Spike
8711	Wire Jenny Stand
8716	4 Arm Double Stacker Wire Jenny with Spike
8713	Double Stacker Wire Jenny Stand
8719	Helix Wire Winding Jenny
8710	Reel Easy Uncoiler



8712



8716



8719



8710

### CODE PRODUCT

#### WIRE JOINING

8744	EzeCrimp 3in1 Fencing Tool
8788	EzePull 5in1 Fencing Tool (with staple remover)
8747	2.50mm Crimp Sleeve (Pottle of 100)
8748	2.50mm Crimp Sleeve (Bucket of 1000)
8749	3.15mm Crimp Sleeve (Pottle of 50)
8786	4.00mm Crimp Sleeve (Pottle of 50)
8789	5.00mm Crimp Sleeve (Pottle of 50)
8839	Electric Crimp Sleeve (Pottle of 50)
8787	Barbed Wire Crimp Sleeve (Pottle of 50)



8744



8788



8747



8870

### CODE PRODUCT

#### WIRE STRAINING

8870	XT1 Ratchet Cliplock Wire Strainer (Box of 25)
8871	Universal Ratchet Handle
8731	Easy Wire Puller
8738	Wire Tension Tester
8730	Fixed Handle Chain Strainer
8881	Removable Handle Chain Strainer
8735	Boundary Strainer D Shackle
8720	0.9m Strainer Board
8721	1.3m Strainer Board
8722	1.9m Strainer Board



8871



8738



8730



8735 & 8720



## CODE PRODUCT

### WIRE CUTTERS & TOOLS

8742	Knipex Wire Cutters
8741	Maun Pliers
8792	Standard 10" Fencing Plier
8708	Star Post Driver
8732	Post Puller and Chain



8742



8741



8792



8708

## CODE PRODUCT

### STAPLES, CLIPS & OTHER ACCESSORIES

8760	30 x 4.0mm Barbed Staples (5kg Bucket)
8760L	30 x 4.0mm Barbed Staples (25kg Bucket)
8761	40 x 4.0mm Barbed Staples (5kg Bucket)
8761L	40 x 4.0mm Barbed Staples (25kg Bucket)
8762	50 x 4.0mm Barbed Staples (5kg Bucket)
8762L	50 x 4.0mm Barbed Staples (25kg Bucket)
9961	Ring Fastener Gun
7010	Ring Fasteners (Box of 1000)
8770	80mm Coupling Clips (Pack 250)
8771	100mm Coupling Clips (Pack 250)
8772	120mm Coupling Clips (Pack 250)
8775	Fencing Post Clips (Pack 300)
8780	Tie Fast (Pack 300)
8781	Tie Fast (Drum 3000)
8785	Yellow Fence Post Cap



8732



8775, 8780, 8770





## Automatic Gate Openers

Southern Wire distributes and services the American range of automatic gate openers in Australia. They are amongst the most popular in the world due to their reliability and easy DIY installation. Southern Wire offers phone assistance for installation as well as lifetime product support.

All units are battery powered which can be charged by mains power or using the 10W Solar Charging Kit.

The SMART Series is now available which allows you to open the gate via your phone.



Designed  
in the USA



Spare parts  
carried locally



Do-It-Yourself



For more information and pricing, speak to your local representative, or email us [enquiries@southernwire.com.au](mailto:enquiries@southernwire.com.au)

## Contractor Post Driver

Powerful and portable commercial driver designed for fencing contractors. The Titan Petrol Powered Post Driver is recognised as a leading post driver in the agricultural industry. Assembled and serviced by Southern Wire in Australia using a genuine Honda 4-stroke petrol engine.

Powered by a genuine Honda engine, with internal dampening springs making it ideal for all-day, every-day use. The unit is supported and serviced by Southern Wire with the full range of parts available for shipment to any location in Australia.

### Product Features:

- Powered by a 35cc, Honda 4-stroke engine.
- 1,850 beats-per-minute.
- 82mm barrel. Fits over standard size and extra-large steel star posts.
- Adapter sleeve for 25mm - 50mm posts.
- High-quality sealed bearings and Viton O-rings for long tool life.
- Internal dampening springs to lessen vibration to the operator.
- Simple recoil pull start with trigger throttle and integrated stop button.
- Comes with tool kit for servicing and a protective storage case.
- Limited lifetime hammer warranty.




For more information and pricing, speak to your local representative, or email us [enquiries@southernwire.com.au](mailto:enquiries@southernwire.com.au)

# TITAN




## PREFABRICATED FENCE WIRE SPACINGS




**5/70/30**

Sheep only




**6/70/30**

Sheep and Lamb




**6/90/30**

Cattle




**7/90/30**

All stock




**8/90/15**

Intensive boundary

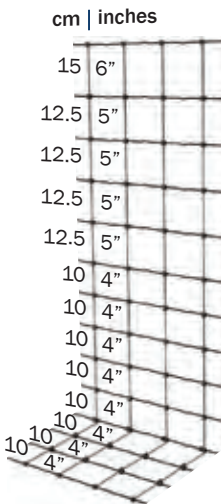


**11/115/15**

with 30cm  
Hinged Apron

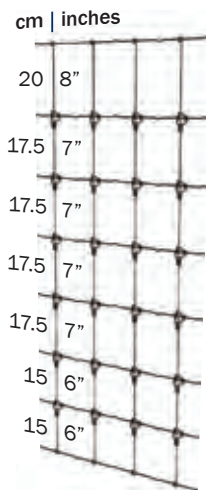


**8/120/15**

Intensive boundary and  
Goat

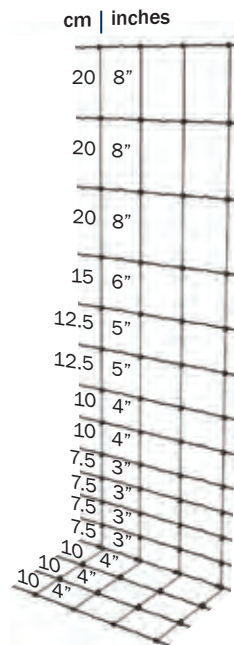

**13/150/15**


with 30cm  
Hinged Apron

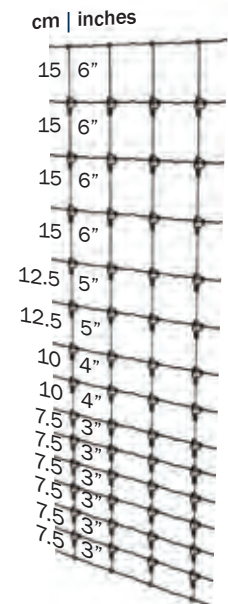


**15/150/15**

Internal deer/Game/  
Vermin




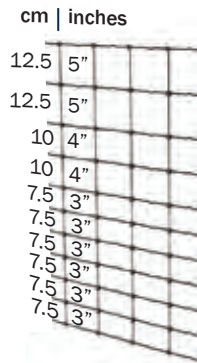


**11/90/15**  
Vermin

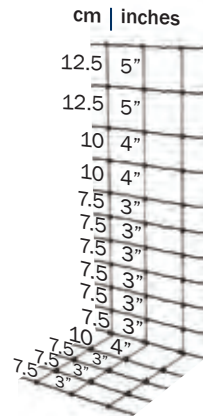


**11/90/15**  
with 32.5cm  
Hinged Apron

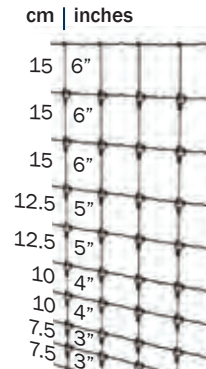


**10/110/15**  
Intensive goat

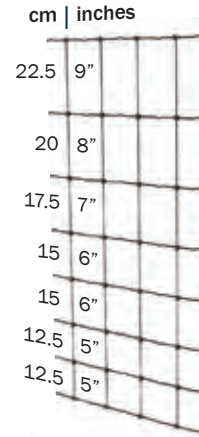


**8/115/15**  
Vermin

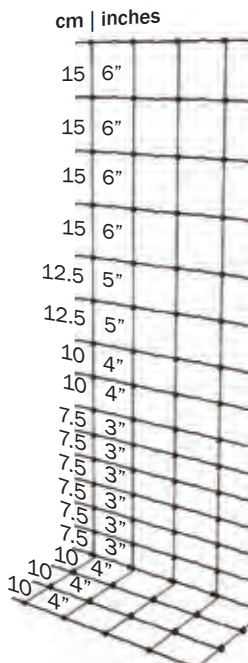


**15/150/15**  
with 30cm  
Hinged Apron

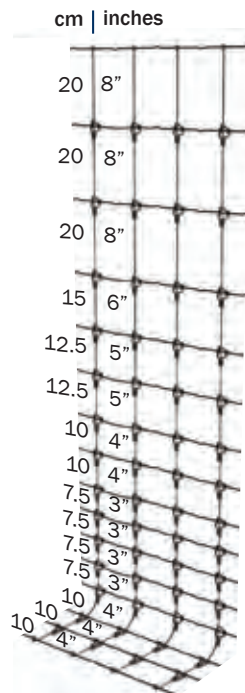

**16/180/15**  
with 30cm  
Radius Apron

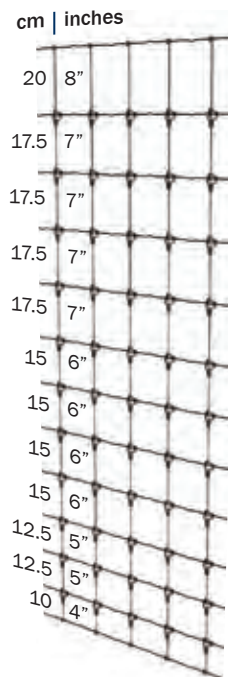

**13/190/15**  
Intensive boundary/Emu

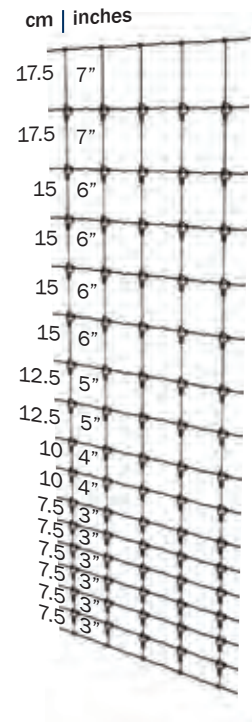

**17/190/15**  
Boundary deer/Game/  
Vermin



## Warehouse Locations



**SA Warehouse**

Phone: 1800 627 722  
Two Wells SA 5501

**VIC Warehouse**

Phone: 1800 627 722  
Derrimut VIC 3026

**NSW Warehouse**

Phone: 1800 627 722  
Minchinbury NSW 2770

**QLD Warehouse**

Phone: 1800 627 722  
Crestmead QLD 4132

**NT Warehouse**

Phone: 1800 627 722  
Berrimah NT 0828

**Southern Wire Pty Ltd**

ABN 37 009 150 421

**Head Office & Manufacturing**

311 Collier Road Bassendean WA  
6054

Mailing Address:

PO Box 3232 Bassendean DC WA 6942



Phone: +61 8 9279 9999



Orders:  
orders@southernwire.com.au

Enquiries:  
enquiries@southernwire.com.au